

Flat Frame

The Details:

Please check the details to make sure the frame you need is a flat frame.

If your existing frame only has face on the wall and has no lips / raised edges or returns, it is a Flat Frame.

Our Flat Frames are made in the traditional, double layered Method. We start with a mild steel backing plate and then Cover or wrap with the finishing material i.e. Stainless steel/Brass/ Copper wrapping round the edges. The corners are mitred for A nice smooth finish with no cut edges on show. Both layers Together are approx.3-4mm thick.




Pictured is the top corner section of a frame from the back to show this wrapping technique

HOW TO MEASURE A FLAT FRAME



Face size

Normally the face measurements are identical on all 3 sides, however you can request different face sizes for the top or the legs. Just add your requirements to the special Instructions section on the order form. For example: you might want a 60mm top face and 50mm Leg faces. Use the largest face size when calculating your price.

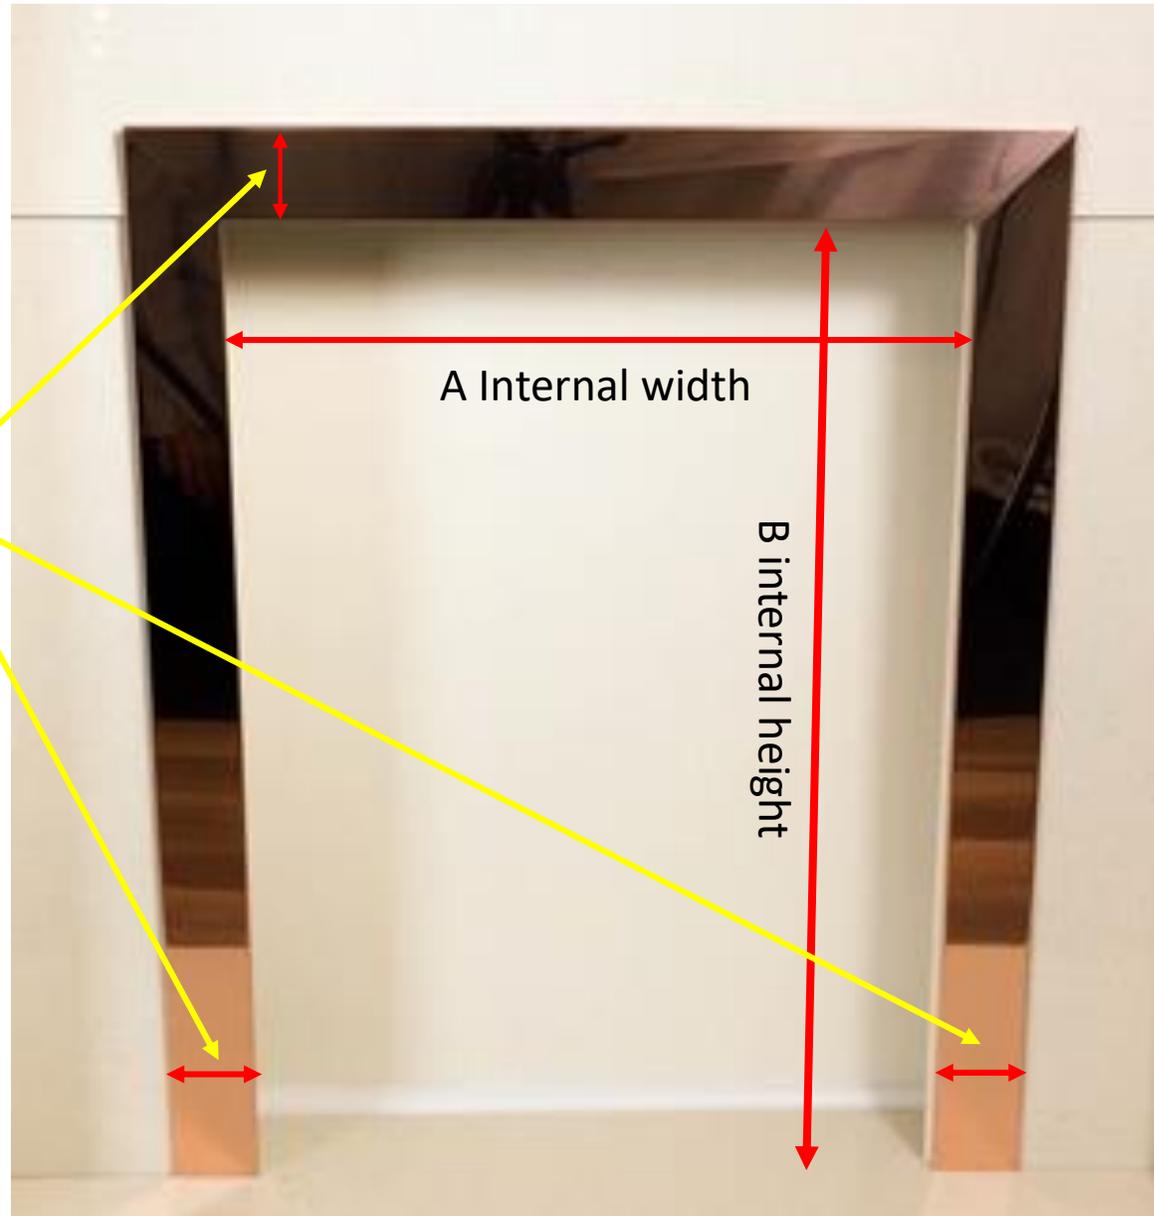


A little Tip:

Internal Measurements

If you have measured an existing frame that you need us to copy that is clear & simple. However, if you have measured the opening in your wall and need a frame to finish it off, you may want to think about bringing the internal measurements of the frame in a few mm, just to hide the edges of your opening.

IF YOU PREFER TO
EMAIL US A SKETCH
PLEASE USE THIS
TEMPLATE

FLAT FRAME SKETCH

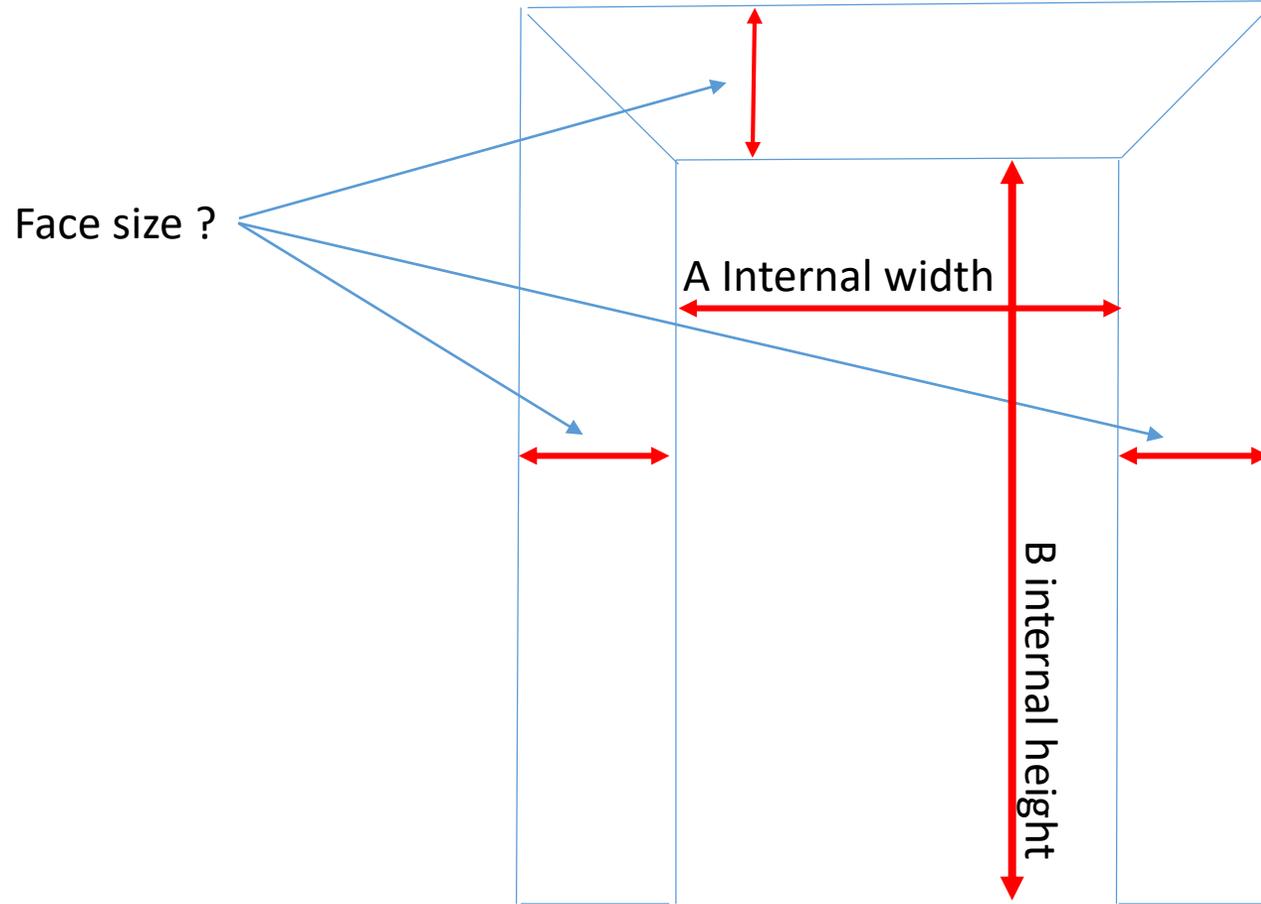

FIXING YOUR FLAT FRAME

We can offer 2 options:


OPTION 1

If you don't need to remove your frame once it's in situ, we can provide heat resistant adhesive to simply glue in place.



OPTION 2

If you need to remove your frame from time, we can provide self adhesive metal strips to attach behind the frame plus magnets to connect the frame

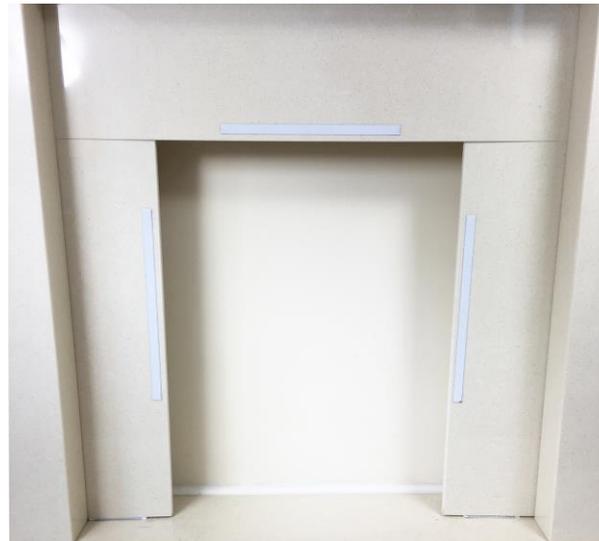

Self Adhesive Steel Strips



Magnets on Back of Frame